

# ECX Series 22 mm Metal Pilot Devices


## Audible annunciator



- 80 dB @ 10 cm
- 25 mA @ 24V
- Intermittent sound when energized
- IP20 before installation

Part Number	Color	Price	Description
<b>ECX2070-24</b>	Black	<--->	22 mm, 25 mA audible (80dB at 10 cm) buzzer annunciator. 24VAC/DC
<b>ECX2070-127</b>	Black	<--->	22 mm, 25 mA audible (80dB at 10 cm) buzzer annunciator. 120VAC/DC
<b>ECX2071-24R</b>	Red	<--->	22 mm, 25 mA audible (80dB at 10 cm) buzzer annunciator with non-replaceable LED indicator. 24VAC/DC
<b>ECX2071-127R</b>	Red	<--->	22 mm, 25 mA audible (80dB at 10 cm) buzzer annunciator with non-replaceable LED indicator. 120VAC/DC

Dimensions: mm [inches]

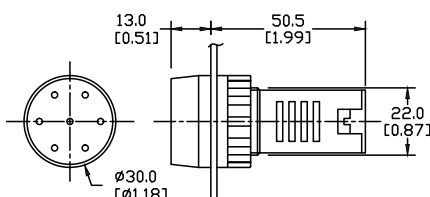


## 22 mm potentiometer



- IP65

Part Number	Quantity	Price	Description
<b>ECX2300-5K</b>	pkg. of 1	<--->	22 mm potentiometer with 5k $\Omega$ resistance, $\pm 10\%$ . Nominal voltage: 250V. Rated dissipation: 2W at 25°C. Temperature range -40°C to 70°C. Black handle
<b>ECX2300-10K</b>	pkg. of 1	<--->	22 mm potentiometer with 10k $\Omega$ resistance, $\pm 10\%$ . Nominal voltage: 250V. Rated dissipation: 2W at 25°C. Temperature range -40°C to 70°C. Black handle
<b>ECX2640</b>	pkg. of 1	<--->	22 mm legend plate for potentiometer with 0% to 100% marking, 50 mm square. 50 x 50 x 1mm with 24.5mm cutout.

Dimensions: mm [inches]

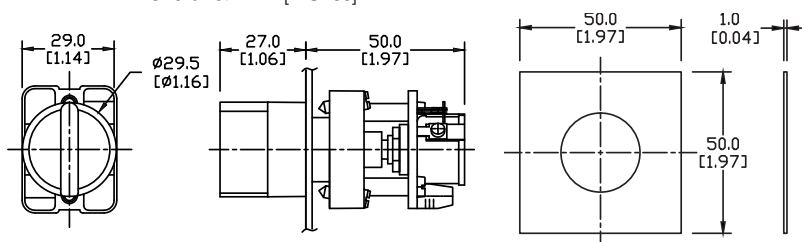

For accessories, see 22 mm Metal Pilot Device Accessories in this section.